

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. NET WEIGHT IS 3.80 LBS, [1.73 kg].

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF AMERICAN POWER CONVERSION AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM APC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.




TITLE: RACK PDU METERED, 1U
INPUT: 12A/208V, 10A/230V; IEC 320 C14
OUTPUT: 208V, 230V (8) IEC 320 C13
MAIN MECHANICAL

DWG NO: AP7820

REV: 0


DRAWN: B ZAHN	04-FEB-09	THIRD ANGLE PROJECTION
ENGINEER: Y JIANG.T HORSTMANN	04-FEB-09	
APPROVED: B SHERIDAN/E SILVA	04-FEB-09	

PROJECT: SUBMITTAL DRAWINGS | **SHEET 1 OF 2**




INPUT POWER CORD
LENGTH IS 71.46-99.25 (1800-2500MM)


POWER CORD DETAIL



VIEW C
(CONNECTOR FACE VIEW
IEC320 C14 PLUG-ENLARGED)



VIEW D
(CONNECTOR FACE VIEW
IEC320 C13 PLUG-ENLARGED)

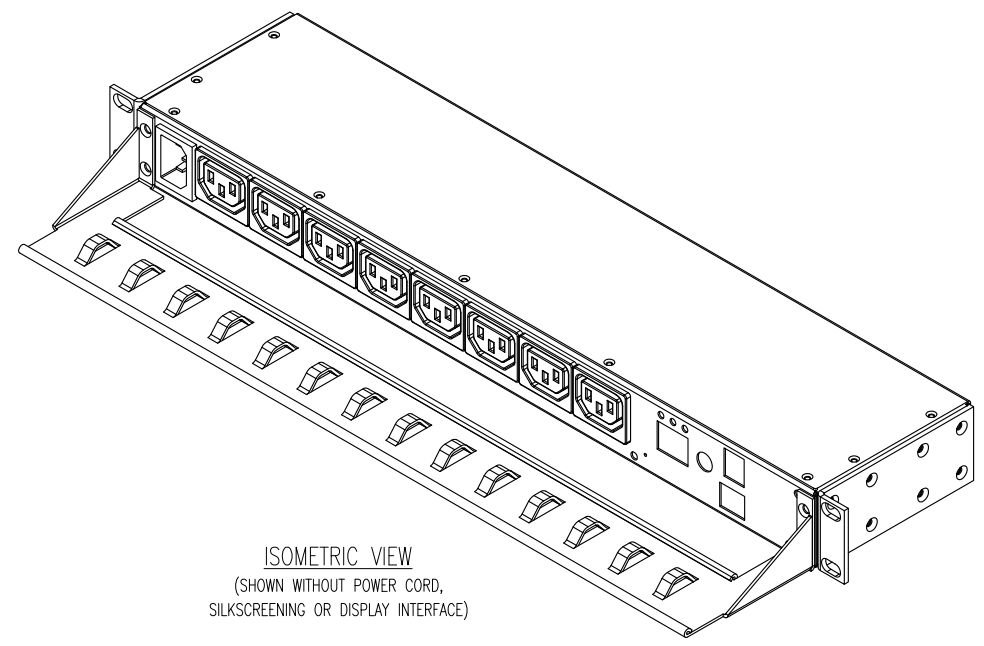

ISOMETRIC VIEW
(SHOWN WITHOUT POWER CORD,
SILKSCREENING OR DISPLAY INTERFACE)

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF AMERICAN POWER CONVERSION AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM APC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: RACK, PDU, METERED, 1U
INPUT: 12A/208V, 10A/230V, IEC 320 C14
OUTPUT: 208V, 230V (8) IEC 320 C13
ISOMETRIC VIEW AND DETAILS

PROJECT: SUBMITTAL DRAWINGS | SHEET 2 OF 2

DWG NO:	AP7820	REV:	0
DRAWN:	B ZAHN	04-FEB-09	THIRD
ENGINEER:	Y JIANG.T HORSTMANN	04-FEB-09	ANGLE
APPROVED:	B SHERIDAN/E SILVA	04-FEB-09	PROJECTION