


ToughCat 5e

S/FTP Installation Cable for tougher environments

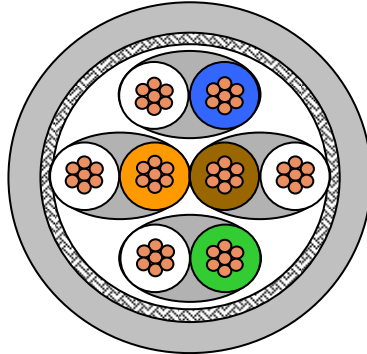

Application

Generic Data transmission. This cable is a **Cat5e S/FTP** cable meant for use as installation (horizontal) cable in tougher electrical and mechanical environment, including ships and offshore units.

Standards

EN 50173-1; EN 50288-2-1
ISO/IEC 11801; IEC 61156-5
Det Norske Veritas (DNV) specification No. 6-827.50-2 and Lloyd Register approval system, 2002

Fire rating

LSHF-FR(SHF1) : IEC 60754-2; IEC 61034, IEC 60332-3-24

Chemical resistance

Mineral oils IRM 902 (IEC60811-2-1) : 7 days/23°C
4 hours/70°C
Diesel - IRM 903 (IEC60811-2-1) : 7 days/23°C
4 hours/70°C

Certification

This cable is certified by: Det Norske Veritas (DNV) and Lloyd Register.

Construction

Conductor	Stranded copper wire Ø 0.22 mm ²
Insulation	PE, Ø 1.4 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs
Pair screen	Al-laminated plastic foil around each pair
Overall screen	Copper braid, tinned Ø 6,2 mm
Sheath	Oil resistant, Fire retardant and halogen free LSHF-FR(SHF1).

Mechanical Properties

Bending radius	Without load	8 x D
	With load	4 x D
Temperature range	During operation	-40°C to + 85°C
	During installation	-15°C to + 50°C
Fire load	4 pair	515 MJ/km
Maximum tensile load	During operation	No load
	During installation	100 N

ToughCat 5e

Electrical Properties

at 20°C

DC loop resistance		≤ 158 Ω/km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 5000 MΩxkm
Capacitance	at 800 Hz	Nom. 43 nF/km
Capacitance unbalance	(pair to ground)	≤ 1500 pF/km
Mean Characteristic impedance	@ 100 MHz	100 ± 5 Ω
Nominal velocity of propagation		0,75c
Propagation delay		≤ 450 ns/100 m
Delay skew		≤ 15 ns/100 m
Transfer impedance	at 1 MHz	≤ 10 mΩ /m
	at 10 MHz	≤ 8 mΩ /m
	at 30 MHz	≤ 10 mΩ /m
Coupling attenuation		≥ 85 dB

Nominal Transmission characteristics

at 20°C

F (MHz)	Attenuation (dB/100m)	NEXT (dB)	ACR (dB/100m)	Return loss (dB)	PS-NEXT (dB)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)
1	2,1	90	88		87	85	85	82
4	4,0	90	86	27	87	83	85	82
10	6,3	90	84	30	87	81	79	76
16	8,0	90	82	30	87	79	75	72
20	9,0	90	81	30	87	78	73	70
31.25	11,4	90	79	30	87	76	69	66
62.50	16,5	86	70	30	83	67	63	60
100	21,3	83	62	30	80	59	59	56
155.00	24,2	81	57	26	78	54	57	54
200.00	31,5	78	47	25	75	44	53	50
250.00	35,8	77	41	25	74	38	51	48
300.00	47,1	73	26	23	70	23	47	44
600.00	60,1	71	11	20	68	8	44	41

Technical Data

Description	Variant	Colour	Outer diameter (D) mm	Delivery form	Weight kg/km	Material code		El. No	DCN No.
ToughCat 5e S/FTP 4x2/0,22mm ²	LSHF-FR (SHF1)	Grey RAL7035	7,7	Drum 500m	68	1000745	-00500DP	1089209	792621