


6.7 Dimensioni motore HBV

6.7 HBV motor dimensions

Forma costruttiva - Mounting position IM B5, IM B5R, IM B5...

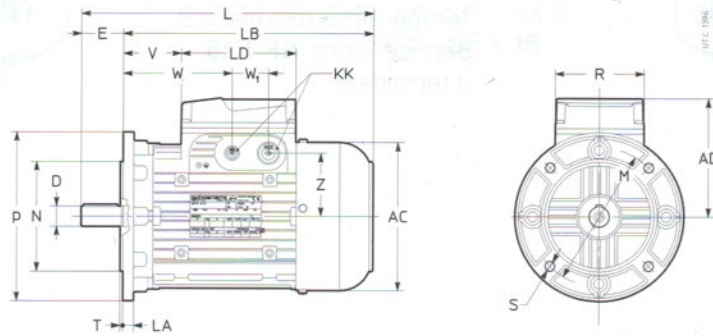

63 ... 160S

Grand. motore Motor size	AC	AD	L	LB	LD	KK	R	V	W	W ₁	Z	Estremità d'albero - Shaft end				Flangia - Flange																			
												D	E	F	GA	M	N	P	LA	S	T														
	∅					2)						∅	1)		h9	∅	∅	∅	∅																
63	B5R	123	95	242	222	103	4xM16	86	46	86	36	45	9	j6	M3	20	3	10,2	100	80	j6	120	8	7	3										
	B5A			245					-	11			j6	M4	23	4	12,5																		
	B5			228					205	29			69	11 ³⁾	j6	M4	23 ³⁾	4								12,5	115	95	j6	140	10	9	3		
	BX1																										130	110	j6	160			3,5		
71	B5B	138	112	266	243	2xM16 + 2xM20	66	106	47	87	62	62	11	j6	M4	23	4	12,5	100	80	j6	120	8	7	3										
	B5R			273										14	j6	M5	30	5								16	115	95	j6	140	10	9			
	B5A			254									224	11 ³⁾	j6	M4	23 ³⁾	4								12,5	130	110	j6	160			3,5		
	B5			247										14 ³⁾	j6	M5	30 ³⁾	5								16	165	130	j6	200	12	11			
	BX2			254																															
	BX5																																		
BX1																																			
80	B5B	156	121	293	263	2xM16 + 2xM25	106	60	120	43	75	75	14	j6	M5	30	5	16	115	95	j6	140	10	9	3										
	B5R			303										19	j6	M6	40	6								21,5	130	110	j6	160			3,5		
	B5A			282									242	59	99	14 ³⁾	j6	M5								30 ³⁾	5	16	165	130	j6	200	12	11	
	B5			272																															
90 S ⁴⁾	B5S	176	141	317	287	2xM16 + 2xM25	106	60	120	43	75	75	14	j6	M5	30	5	16	130	110	j6	160	10	9											
	B5B			327										19	j6	M6	40	6							21,5										
	B5R			306									266	24	j6	M8	50	8							27	165	130	j6	200	12	11				
	B5			316										14	j6	M5	30	5							16	130	110	j6	160	10	9				
90 L	B5S	176	141	347	296	2xM16 + 2xM25	106	60	120	43	75	75	19	j6	M6	40	6	21,5	165	130	j6	200	12	11											
	B5B			357										24	j6	M8	50	8							27										
	B5R			336										14	j6	M5	30	5							16	130	110	j6	160	10	9				
	B5			346										19	j6	M6	40	6							21,5	165	130	j6	200	12	11				
100	B5C	194	151	387	347	2xM16 + 2xM25	106	60	120	43	75	86	19	j6	M6	40	6	21,5	130	110	j6	160	10	9											
	B5S			397										24	j6	M8	50	8							27	165	130	j6	200	12	11				
	B5R			407										28	j6	M10	60	8							31										
	B5A			380									320	82	142	215	180	j6							250	14	14	4							
B5																																			
112	B5S	218	163	409	369	2xM16 + 2xM25	106	60	120	43	75	98	19	j6	M6	40	6	21,5	165	130	j6	200	12	11	3,5										
	B5R			419										24	j6	M8	50	8								27									
	B5A			429										28	j6	M10	60	8								31	215	180	j6	250	14	14	4		
	B5			403									343	100	160																				
132 S, M ⁵⁾	B5S	257	194	484	434	2xM16 + 2xM32	148	113	201	55	109	109	24	j6	M8	50	8	27	165	130	j6	200	12	11	3,5										
	B5B			494										28	j6	M10	60	8								31	215	180	j6	250	14	14	4		
	B5R			514										38	k6	M12	80	10								41	265	230	j6	300					
	B5A			479									399																						
	B5																																		
132 MA ⁶⁾ ... MC	B5S	257	194	544	494	2xM16 + 2xM32	148	113	201	55	109	109	24	j6	M8	50	8	27	165	130	j6	200	12	11	3,5										
	B5B			554										28	j6	M10	60	8								31	215	180	j6	250	14	14	4		
	B5R			574										38	k6	M12	80	10								41	265	230	j6	300					
	B5A			539									459																						
	B5																																		
160 S	B5			588	478								42	K6	M16	110	12	45	300	250	h6	350	15	18	5										

1) Foro filettato in testa.

2) Predisposizione per accesso cavi su entrambi i lati (due fratture prestabilite per ogni lato, bocchettone pressacavo non fornito).

3) Estremità d'albero non normalizzata.

4) Per motore HB3V 90S 2 e HB3V 90 S4 quote come grand. motore 90L.

5) Per motore HB3V 132SB 2, HB3V 132 SC2 e HB3V 132S 4 quote come grand. motore 132 MA ... MC.

6) Per motore HBV 132MA 2 quote come grand. motore 132S, M.

1) Tapped butt-end hole.

2) Prearranged cable entry knockout openings on both sides (two openings on each side, cable gland and threaded plug not supplied).

3) Shaft end not according to standard.

4) For motors HB3V 90S 2 and HB3V 90 S4 the dimensions are the ones of sizes 90L.

5) For motors HB3V 132SB 2, HB3V 132 SC2 and HB3V 132S 4 the dimensions are the ones of sizes 132 MA ... MC.

6) For motor HBV 132MA 2 dimensions are the ones of size 132S, M.