


PFG80 is a flameproof level gauge, manufactured according to CEI rules.

PFG80 is particularly designed for plants or rooms where, owing to chemical processing or particular products flammable and explosive tunings may develop, making it dangerous to use electric operating units not properly designed for this.

EEx d IIB T6

Temperature class T6 = 85 °C

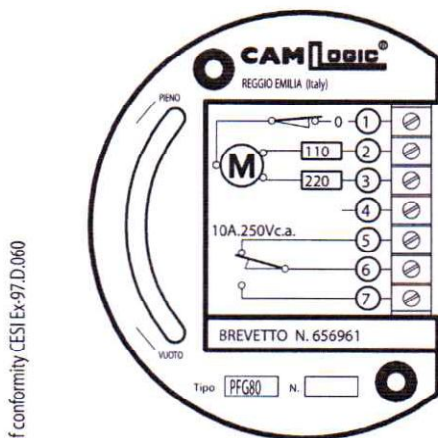

Certificate of conformity CESI Ex-97.D.060

WIRING

- | | |
|-----|---------------------------------|
| 1 - | Common power supply |
| 2 - | Power supply 110 Va.c. 50/60 Hz |
| 3 - | Power supply 220 Va.c. 50/60 Hz |
| 4 - | Not used |
| 5 - | NC contact 10A/250 Va.c. |
| 6 - | Common contacts |
| 7 - | NO contact 10A/250 Va.c. |

Electric motor draw 4 W

Weight : 3,500 Kg

On request power supply at 24/48 Va.c. 50/60 Hz