




### BILL OF MATERIAL

PIECE NO.	NAME OF PART	QTY.	MATERIAL	PART NO.	REMARKS
1	CHAMBER	1	321L SS	L-1591-49-Y	ASTM A240
2	GASKET	4	IFG5500	V-18980-9	NON-ASBESTOS
3	GLASS	4	TEMPERED GLASS	V-16757-9	
4	CUSHION	4	IFG5500	V-18980-9	NON-ASBESTOS
5	COVER	4	STEEL	V-2-9-AL4	AISI C1040
6	U-BOLT	32	ALLOY STL	P-256-B71	ASTM A193 GR.B7
7	NUT	64	STEEL	V-11062-2HA	ASTM A194 GR.2H
8	RATING TAG	1	S. S.	V-16341-9	

MAX. STEAM RATING FOR SERIES 20 REFLEX GAGES IS 300 W.S.P.

**NOTES:**

- DIMENSIONS IN mm w/ INCH EQUIVALENT IN PARENTHESES.
- UNIT RATING W/ 300#RF FLANGES:  
720 PSI @ 100°F, 460 PSI @ 500°F  
51 KG/CM<sup>2</sup> @ 38°C, 32 KG/CM<sup>2</sup> @ 260°C

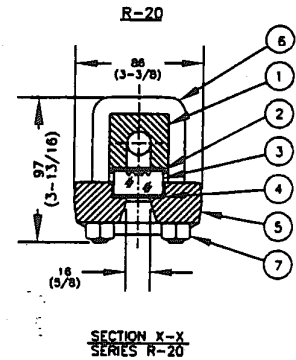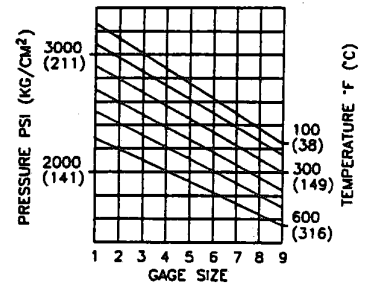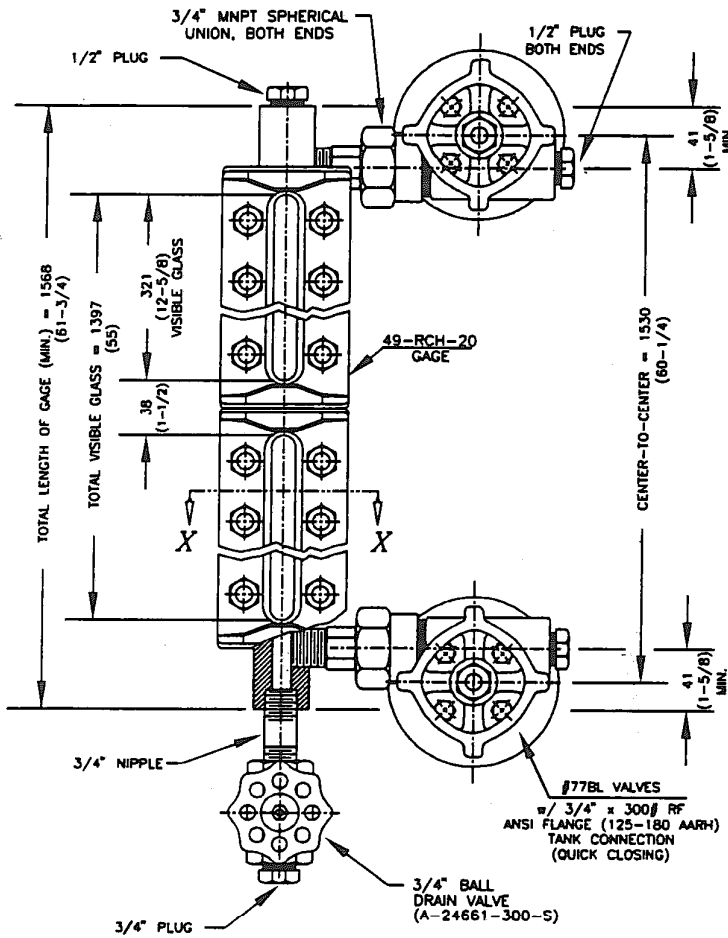

TAG No.	ORIENTATION
506-LG-0350A	C
506-LG-0350B	C
606-LG-0350A	C
606-LG-0350B	C

49-RCH-20 GAGE WITH #77BL VALVES

**JERGUSON**  
**GAGE & VALVE CO.**  
 STRONGSVILLE, OHIO, U.S.A.

DRAWN LMC  
 CHECKED  
 APPROVED

FILE NO.  
 DRAWING NO. 94065-51  
 REV. 4

SCALE NONE DATE 5/9/97