


Single-ended cordset, Automation Line, M12x1

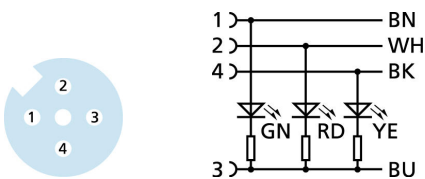

Product data

| | |
|--------------------|----------------------|
| Item description | AL-WWAK4P3.1-2/S7400 |
| Item-No. | 8058943 |
| Length | 2m |
| Customs tariff-No. | 85444290 |
| Step-File | AL-WWAK4P3_1.stp |
| EAN | 4047106144661 |

Technical data

| | |
|--------------------------------|---------------------------------|
| Connector | female, M12x1, angled, with LED |
| Number of pins | 4 |
| Pin assignment | 1 BN, 2 WH, 3 BU, 4 BK |
| Coding | A |
| Rated voltage | 30V |
| Current load (at 40°C) | 4A |
| Insulation resistance | $\geq 10^9 \Omega$ |
| Resistance | $\leq 5 m\Omega$ |
| Ambient temperature product | -30°C...+90°C |
| Circuit logic | npn |
| Signal status-indicator | LED YE/RD |
| Operating voltage-indicator | LED GN |
| Contact material | Metal, CuSn, gold-plated |
| Contact-carrier material | Plastic, TPU, BK |
| Grip body material | Plastic, TPU, transparent |
| Coupling nut material | Metal, CuZn, nickel-plated |
| Sealing (female) material | FPM/FKM |
| Standards | IEC 61076-2-101 |
| Degree of protection (mounted) | IP65, IP67, IP68 |
| Mechanical life-cycle | >100 mating cycles |
| Cable end assembly | open cable end |
| Degree of pollution | 3 |

| Cable | S7400, PUR, robotic, UL |
|-------|-------------------------|
|-------|-------------------------|

Flexible, silicone- and halogen free control cable with high mechanical strength. Due to its outstanding properties in drag-chain adaption, torsionresistance and weld-field immunity, it is very well suited for the flexible applications in robotics, handling- and assembly technology as well as machine tools. The cable meets the UL and CSA (UL10493/20549; cULus) requirements.

| | |
|--------------------------------|--|
| Outer diameter of jacket | 5,20 mm |
| Cable-jacket material | PUR |
| Jacket color | OG, similar RAL2003 |
| Wire cross-section | 4 x 0.34 mm ² |
| Wire insulation material | PP |
| Wire colors | BN, WH, BU, BK |
| Conductor structure | 42 x 0.10 mm |
| Bending radius (fixed) | 5 x Ø-cable |
| Bending radius (repeated) | 10 x Ø-cable |
| Temperature range (repeated) | -30°C...+90°C |
| Temperature range (fixed) | -40°C...+90°C |
| Temperature range (drag chain) | -25°C...+60°C |
| Drag chain-application | ≥ 10 Mio. cycles, max. 5m/s ² |
| Halogen-free | Yes |
| Torsion | +/-360°/m, ≥ 10 Mio. cycles |
| Rated voltage cable | ≤300 V |
| Special features | flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain-adapted, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant |

| Classification | |
|----------------|--|
|----------------|--|

| | |
|------------|----------|
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0 | EC001855 |
| ETIM 6.0 | EC001855 |

| Accessories | Web-Link |
|-------------|----------|
|-------------|----------|

| | |
|----------------------|---|
| Mounting-set, M12x1 | https://www.escha.net/en/search?sSearch=8047664 |
| Torque-wrench set | https://www.escha.net/en/search?sSearch=8055431 |
| Marking rings Ø 9mm | https://www.escha.net/en/products/accessoires/marking-rings/ |
| Cable Stripping Tool | https://www.escha.net/en/search?sSearch=8066215 |
| Cable Stripping Tool | https://www.escha.net/en/search?sSearch=8066216 |